



Unibond® Plus OnGuard

HIGH PERFORMANCE BACKING SYSTEM MOISTURE SOLUTION

OnGuard is a revolutionary moisture barrier that enhances Mohawk's Unibond Plus backing system with an integrated layer that prevents moisture from getting beneath the carpet backing. This advanced moisture barrier passes both the British Spill Test and the 10,000 impact test. Unibond Plus OnGuard is the ideal solution for areas requiring high performance flooring prone to frequent spills and areas with existing high moisture subfloor concerns. When installed using Mohawk Group's NuBroadlok® VRT broadloom adhesive and NuBroadlok Moisture Proof Latex Seam Sealer, Unibond Plus OnGuard forms a fortified barrier to safeguard from spills, while allowing moisture vapor to safely pass through the system.

PERFORMANCE

- Moisture barrier backing lowers maintenance costs by keeping spills near the surface
- Less dry time for quicker occupancy after cleaning
- High performance moisture barrier backing designed for demanding commercial environments
- OnGuard system has a soft felt integrated bottom layer to provide comfort underfoot along with preventing scratching on walls during installation
- Lightweight for lower transportation costs and ease of handling
- High tuft bind properties
- Eliminates edge ravel and zippering
- Limited Lifetime Warranty protects against tuft bind, edge ravel, zippering and delamination
- Passes British Spill test
- Passes 10,000 impact testing
- 15-year limited warranty on adhesive with no concrete moisture testing required*

INSTALLATION


- For use with direct glue or stretch in installations; stretch in installations do not have moisture barrier at tack strips
- 12' wide system offers half the seams of some competitive products while maintaining a solvent-free watertight seam
- No setup time needed on the adhesive for stretch in installations and pattern matching, saving time on installation

SUSTAINABILITY

- Certified low VOC's under CRI Green Label Plus Program
- May contribute to or comply with LEED v4, Living Building Challenge and the WELL Building Standard
- Declare Label Red List Free

SERVICE

- 133 SY minimum (100 linear ft.)

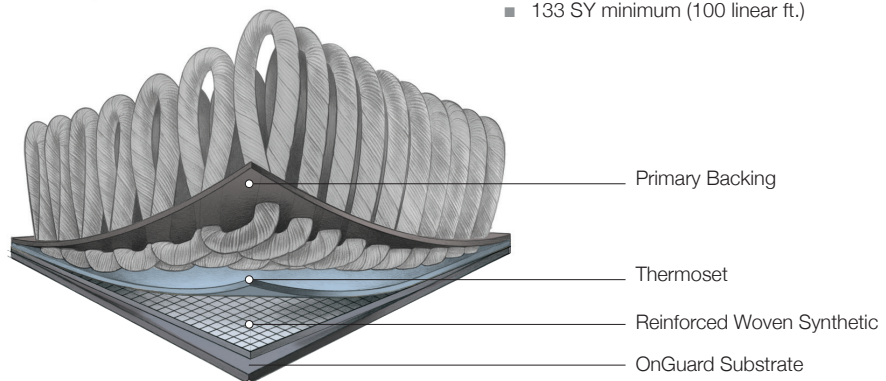

*15-year limited warranty applies to subfloors with up to 12 pH and are a minimum of 14 days old. Codes ASTM F710, RFCI, and ICRI install guidelines apply